



REXAM
FROM CONCEPT TO CREATION

PRODUCT CATALOUGE OUTDOOR LIGHTING-3

2026

NEW
COLLECTION

WWW.REXAMGROUP.COM



01014074000



EITahra Mall, Street 34, 1st District, Elsheikh Zayed, GIZA

CONTENTS

OUR PARTNERS

**OUTDOOR LIGHTING:
PATHWAY & WALL UNITS**

WALL LIGHTING

LANDSCAPE LIGHTING

**MODERN LIGHTING:
RECESSED DOWN LIGHT
SURFACE DOWN LIGHT**

**INDOOR:
TRACKS
MAGNETIC**

CONTACT

OUR PARTNERS

Panasonic

Schneider
Electric

OSRAM

ELSEWEDY
ELECTRIC

SIEMENS

ABB

PHILIPS

TOSHIBA



3BROTHERS
BIG, BRILLIANT, BRIGHT

iLOCK

elios

LIFUD
LED Driver

EGY

LUX

DURA.Light
MODERN DECORATION LIGHTING

Golden Light
For Electrical Supplies

SONOFF

ELSEWEDY
CABLES

OUTDOOR LIGHTING



PATHWAY AND WALL LIGHTING



ANDA



ANDA

Elegant but robust bollard which integrated well in your garden layout in a multi-installation format. The powerful light output will give a strong light but will not dazzle people passing by.

SPECIFICATIONS

| CONSTRUCTION | | | | | | IDENTITY | |
|----------------------|----------|-----------|-------------------|--|---------------------|-----------|-------|
| Body | Diffuser | Reflector | LED Type & Origin | Driver, Brand, Power, Amp | Surface or Recessed | Code | Color |
| HEAVY-DUTY ALUMINIUM | CLEAR PC | - | Lextar-SMD Taiwan | Lutec driver uld 12-350I (100-240vac 350ma 10*1w /11*1w /12*1w | Surface | DU-2122-1 | ● |

| ELECTRICAL DATA | | | | | | FIXTURE PARAMETERS | |
|-----------------|-----------|--------------|------------|------------|-------------------|--|------------|
| Power | Lumen | Power Factor | Voltage | Frequency | Energy Efficiency | Size | Beam Angle |
| 🔌 18 Watt | 💡 1,040Lm | ⚡ 0.84 | ⚡ 220-240v | 📡 50/60 Hz | 💡 A+ | Width : 202 mm Length : 264 mm Height : 800 mm | 📐 90° |





CUBA BOLLARED



CUBA BOLLARED

This modern outdoor bollard is your best friend and companion. With its 75cm the CUBA bollard leads you along the darkest paths. And that's not all. it's available with a warm white and daylight white integrated LED module. Both versions will create an excellent atmosphere.

SPECIFICATIONS

| CONSTRUCTION | | | | | | IDENTITY | |
|----------------------|----------|-----------|----------------------|---------------------------|---------------------|-----------|-------|
| Body | Diffuser | Reflector | LED Type & Origin | Driver, Brand, Power, Amp | Surface or Recessed | Code | Color |
| HEAVY-DUTY ALUMINIUM | OPAL PC | Aluminum | Everlight-SMD German | - | Surface | DU-2122-2 | ● |

| ELECTRICAL DATA | | | | | | FIXTURE PARAMETERS | |
|-----------------|-----------|--------------|------------|------------|-------------------|--|------------|
| Power | Lumen | Power Factor | Voltage | Frequency | Energy Efficiency | Size | Beam Angle |
| 🔌 23 Watt | 💡 1,000Lm | ⚡ 0.52 | ⚡ 220-240v | 📡 50/60 Hz | 💡 A+ | Width : 110 mm Length : 237 mm Height : 750 mm | 📐 108° |



20.000 Hrs



-20°C to +50°C





BATI



BATI

Modern & stylish bollard with integrated LED light source. Ideal to light the pathways & terraces in your garden.

SPECIFICATIONS

| CONSTRUCTION | | | | | | IDENTITY | |
|----------------------|----------|-----------|-------------------|---------------------------|---------------------|-----------|-------|
| Body | Diffuser | Reflector | LED Type & Origin | Driver, Brand, Power, Amp | Surface or Recessed | Code | Color |
| HEAVY-DUTY ALUMINIUM | OPAL PC | - | Lextar-SMD Taiwan | - | Surface | DU-2122-5 | ● |

| ELECTRICAL DATA | | | | | | FIXTURE PARAMETERS | |
|-----------------|---------|--------------|----------|-----------|-------------------|---|------------|
| Power | Lumen | Power Factor | Voltage | Frequency | Energy Efficiency | Size | Beam Angle |
| 14 Watt | 1,100Lm | 0.5 | 220-240v | 50/60 Hz | A+ | Width :82 mm Length :82 mm Height :650 mm | 61° |



CUBA



CUBA BOLLARED

This modern outdoor bollard is your best friend and companion. With its 75cm the CUBA bollard leads you along the darkest paths. And that's not all. it's available with a warm white and daylight white integrated LED module. Both versions will create an excellent atmosphere.

SPECIFICATIONS

| CONSTRUCTION | | | | | | IDENTITY | |
|----------------------|----------|-----------|----------------------|---------------------------|---------------------|-----------|-------|
| Body | Diffuser | Reflector | LED Type & Origin | Driver, Brand, Power, Amp | Surface or Recessed | Code | Color |
| HEAVY-DUTY ALUMINIUM | OPAL PC | - | Everlight-SMD German | - | Surface | DU-2122-6 | ● |

| ELECTRICAL DATA | | | | | | FIXTURE PARAMETERS | |
|-----------------|---------|--------------|----------|-----------|-------------------|---|------------|
| Power | Lumen | Power Factor | Voltage | Frequency | Energy Efficiency | Size | Beam Angle |
| 23 Watt | 1,000Lm | 0.52 | 220-240v | - | A+ | Width :100 mm Length :147 mm Height :213 mm | 112° |



TRUMPET



TRUMPET

Medium size wall light has a minimalistic yet powerful LED. The moveable spotlight will accentuate your outdoor places. This wall light also exists in a smaller size.

SPECIFICATIONS

| CONSTRUCTION | | | | | | IDENTITY | |
|----------------------|-------------|-----------|----------------------|---------------------------|---------------------|-----------|-------|
| Body | Diffuser | Reflector | LED Type & Origin | Driver, Brand, Power, Amp | Surface or Recessed | Code | Color |
| HEAVY-DUTY ALUMINIUM | CLEAR GLASS | PC | Everlight-SMD German | - | Surface | DU-2122-7 | ● |

| ELECTRICAL DATA | | | | | | FIXTURE PARAMETERS | |
|-----------------|---------|--------------|----------|-----------|-------------------|---|------------|
| Power | Lumen | Power Factor | Voltage | Frequency | Energy Efficiency | Size | Beam Angle |
| 16 Watt | 1,700Lm | 0.67 | 220-240v | 50/60 Hz | A+ | Width :150 mm Length :195 mm Height :150 mm | 116° |



3000K



20,000 Hrs



-20°C to +50°C



TRUMPET



TRUMPET

Small wall light has a minimalistic yet powerful LED. The moveable spotlight will accentuate your outdoor places. This wall light also exists in a larger size.

SPECIFICATIONS

| CONSTRUCTION | | | | | | IDENTITY | |
|----------------------|-------------|-----------|----------------------|---------------------------|---------------------|-----------|-------|
| Body | Diffuser | Reflector | LED Type & Origin | Driver, Brand, Power, Amp | Surface or Recessed | Code | Color |
| HEAVY-DUTY ALUMINIUM | CLEAR GLASS | PC | Everlight-SMD German | - | Surface | DU-2122-8 | ● |

| ELECTRICAL DATA | | | | | | FIXTURE PARAMETERS | |
|-----------------|-------|--------------|----------|-----------|-------------------|---|------------|
| Power | Lumen | Power Factor | Voltage | Frequency | Energy Efficiency | Size | Beam Angle |
| 11 Watt | 850Lm | 0.51 | 220-240v | 50/60 Hz | A+ | Width :94 mm Length :116 mm Height :94 mm | 108° |





ARCTIC



ARCTIC

Robust. powerful recessed LED ground spot. This spot can be raised to an angle of 75 degree. Pick out ornaments & features in your garden with a stunning light effect.

SPECIFICATIONS

| CONSTRUCTION | | | | | | IDENTITY | |
|----------------------|-------------|-----------|-------------------|---------------------------|---------------------|-----------|-------|
| Body | Diffuser | Reflector | LED Type & Origin | Driver, Brand, Power, Amp | Surface or Recessed | Code | Color |
| HEAVY-DUTY ALUMINIUM | FROST GLASS | Aluminum | Seoul-SMD Korean | - | Recessed | DU-2122-9 | ● |

| ELECTRICAL DATA | | | | | | FIXTURE PARAMETERS | |
|-----------------|-------|--------------|---------------------------|-----------|-------------------|---|------------|
| Power | Lumen | Power Factor | Voltage | Frequency | Energy Efficiency | Size | Beam Angle |
| 12 Watt | 650Lm | 0.54 | 220 - 240 V 50 / 60 Hz | 50/60 Hz | A+ | Width :180 mm Length :180 mm Height :120 mm | 27° |



DOBLO



DOBLO

This new medium square DOBLO is available with 2 different kelvins. a warm white and a daylight white light. Both are anthracite grey wall lights and sit in a cubic holder made of durable die cast aluminium. The elegant design catches the eye and radiates powerful rays of warm white light that illuminate the wall.

SPECIFICATIONS

| CONSTRUCTION | | | | | | IDENTITY | |
|----------------------|----------|-----------|----------------------|---------------------------|---------------------|------------|-------|
| Body | Diffuser | Reflector | LED Type & Origin | Driver, Brand, Power, Amp | Surface or Recessed | Code | Color |
| HEAVY-DUTY ALUMINIUM | OPAL PC | - | Everlight-SMD German | - | Surface | DU-2122-11 | ● |

| ELECTRICAL DATA | | | | | | FIXTURE PARAMETERS | |
|-----------------|---------|--------------|----------|-----------|-------------------|---|------------|
| Power | Lumen | Power Factor | Voltage | Frequency | Energy Efficiency | Size | Beam Angle |
| 21 W | 1,600Lm | 0.72 | 220-240v | 50/60 Hz | A+ | Width :150 mm Length :150 mm Height :150 mm | 168° |



EKLIPS



EKLIPS

Multi purpose LED Outdoor wall light with two half-moon shape diffusers. You can turn these two lightheads over an angle of 90°. creating a combination of an Up & Down light. a wallwasher or a frontal light effect.

SPECIFICATIONS

| CONSTRUCTION | | | | | | IDENTITY | |
|----------------------|----------|-----------|-------------------|---------------------------|---------------------|------------|-------|
| Body | Diffuser | Reflector | LED Type & Origin | Driver, Brand, Power, Amp | Surface or Recessed | Code | Color |
| HEAVY-DUTY ALUMINIUM | PET PC | - | Lextar-SMD Taiwan | - | Surface | DU-2122-12 | ● |

| ELECTRICAL DATA | | | | | | FIXTURE PARAMETERS | |
|-----------------|---------|--------------|----------|-----------|-------------------|---|------------|
| Power | Lumen | Power Factor | Voltage | Frequency | Energy Efficiency | Size | Beam Angle |
| 13W | 1,000Lm | 0.51 | 220-240v | 50/60 Hz | A+ | Width :161 mm Length :161 mm Height :146 mm | 112° |





SEATTLE



SEATTLE

Super powerful LED recessed ground spot with a high light efficacy. The beam angle is adjustable from a narrow to a wide beam. This spot will put your garden in a sea of light. The loop in loop out wiring option is available.

SPECIFICATIONS


| CONSTRUCTION | | | | | | IDENTITY | |
|----------------------|-------------|-----------|-------------------|---|---------------------|------------|-------|
| Body | Diffuser | Reflector | LED Type & Origin | Driver, Brand, Power, Amp | Surface or Recessed | Code | Color |
| HEAVY-DUTY ALUMINIUM | CLEAR GLASS | Aluminum | Cree-COB USA | Lutec driver uld25-900(100-240v 900 ma) | Recessed | DU-2122-13 | ● |

| ELECTRICAL DATA | | | | | | FIXTURE PARAMETERS | |
|-----------------|---------|--------------|----------|-----------|-------------------|---|------------|
| Power | Lumen | Power Factor | Voltage | Frequency | Energy Efficiency | Size | Beam Angle |
| 37 Watt | 2,950Lm | 0.95 | 220-240v | 50/60 Hz | A+ | Width :223 mm Length :223 mm Height :285 mm | 60° |





KELSEY TOWER

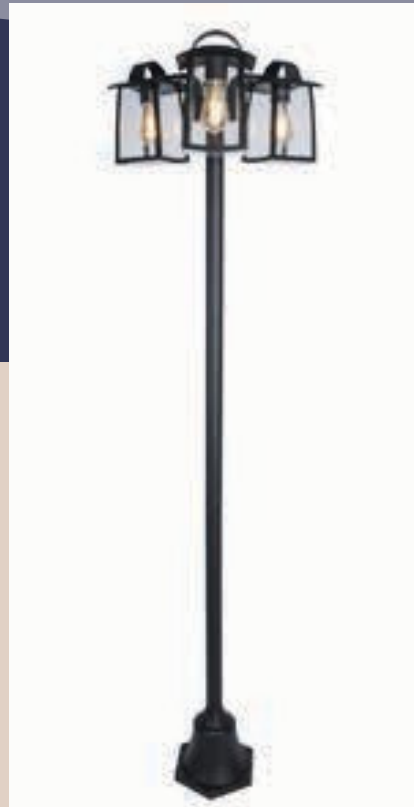

KELSEY TOWER

This black KELSEY post lighting with three E27 light points is a real eye-catcher in your garden due to its charming design. The KELSEY family consists of different outdoor lamp types with 2 different types of glass.

SPECIFICATIONS

| CONSTRUCTION | | | | | | IDENTITY | |
|----------------------|-------------|-----------|-------------------|---------------------------|---------------------|------------|-------|
| Body | Diffuser | Reflector | LED Type & Origin | Driver, Brand, Power, Amp | Surface or Recessed | Code | Color |
| HEAVY-DUTY ALUMINIUM | CLEAR GLASS | - | LED E27 | - | Surface | DU-2122-14 | ● |

| ELECTRICAL DATA | | | | | | FIXTURE PARAMETERS | |
|-----------------|-------|--------------|----------|-----------|-------------------|--|------------|
| Power | Lumen | Power Factor | Voltage | Frequency | Energy Efficiency | Size | Beam Angle |
| 3*E27 40W | - | - | 220-240v | 50/60 Hz | A | Width : 470 mm Length : 470 mm Height:1,950 mm | - |



KELSEY



KELSEY

Give your outdoor spaces an intimate look and feel with this complete outdoor light family. While using the newest filament retrofit LED bulbs with your KELSEY wall lights, you will create a charming atmosphere on your outside walls. Available with clear glass diffuser.

SPECIFICATIONS

| CONSTRUCTION | | | | | | IDENTITY | |
|----------------------|----------|-----------|-------------------|---------------------------|---------------------|------------|-------|
| Body | Diffuser | Reflector | LED Type & Origin | Driver, Brand, Power, Amp | Surface or Recessed | Code | Color |
| HEAVY-DUTY ALUMINIUM | CLEAR PC | - | LED E27 | - | Surface | DU-2122-15 | ● |

| ELECTRICAL DATA | | | | | | FIXTURE PARAMETERS | |
|-----------------|-------|--------------|----------|-----------|-------------------|---|------------|
| Power | Lumen | Power Factor | Voltage | Frequency | Energy Efficiency | Size | Beam Angle |
| E27 40.0 W | - | - | 220-240v | 50/60 Hz | A | Width :170 mm Length :185 mm Height :260 mm | - |





KELSEY



KELSEY

Give your outdoor spaces an intimate look and feel with this complete outdoor light family. While using the newest ?filament? retrofit LED bulbs with your KELSEY wall lights, you will create a charming atmosphere on your outside walls. Available clear glass diffuser.

SPECIFICATIONS

| CONSTRUCTION | | | | | | IDENTITY | |
|----------------------|----------|-----------|-------------------|---------------------------|---------------------|------------|-------|
| Body | Diffuser | Reflector | LED Type & Origin | Driver, Brand, Power, Amp | Surface or Recessed | Code | Color |
| HEAVY-DUTY ALUMINIUM | CLEAR PC | - | LED E27 | - | Surface | DU-2122-16 | ● |

| ELECTRICAL DATA | | | | | | FIXTURE PARAMETERS | |
|-----------------|-------|--------------|----------|-----------|-------------------|---|------------|
| Power | Lumen | Power Factor | Voltage | Frequency | Energy Efficiency | Size | Beam Angle |
| E27 40.0 W | - | - | 220-240v | 50/60 Hz | A | Width :120 mm Length :120 mm Height :200 mm | - |



KELSEY BOLLARD



KELSEY BOLLARD

Give your outdoor spaces an intimate look and feel with this pedestal. While using the newest filament retrofit LED bulbs behind the clear glass diffuser, you will create a charming atmosphere.



SPECIFICATIONS

| CONSTRUCTION | | | | | | IDENTITY | |
|----------------------|----------|-----------|-------------------|---------------------------|---------------------|------------|-------|
| Body | Diffuser | Reflector | LED Type & Origin | Driver, Brand, Power, Amp | Surface or Recessed | Code | Color |
| HEAVY-DUTY ALUMINIUM | CLEAR PC | - | LED E27 | - | Surface | DU-2122-17 | ● |

| ELECTRICAL DATA | | | | | | FIXTURE PARAMETERS | |
|-----------------|-------|--------------|----------|-----------|-------------------|---|------------|
| Power | Lumen | Power Factor | Voltage | Frequency | Energy Efficiency | Size | Beam Angle |
| E27 40.0 W | - | - | 220-240v | 50/60 Hz | A | Width :170 mm Length :150 mm Height :400 mm | - |



ALICE

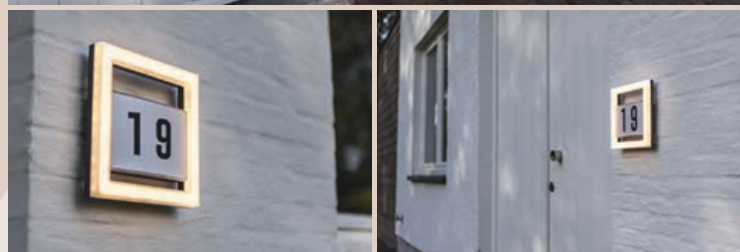

ALICE

The square wall light with light-strip will create a fascinating almost fluid effect. The house number sticker set makes the package complete.

SPECIFICATIONS

| CONSTRUCTION | | | | | | IDENTITY | |
|----------------------|----------|-----------|-------------------|---------------------------|---------------------|------------|-------|
| Body | Diffuser | Reflector | LED Type & Origin | Driver, Brand, Power, Amp | Surface or Recessed | Code | Color |
| HEAVY-DUTY ALUMINIUM | OPAL PC | - | Lextar-SMD Taiwan | - | Surface | DU-2122-18 | ● |

| ELECTRICAL DATA | | | | | | FIXTURE PARAMETERS | |
|-----------------|-------|--------------|----------|-----------|-------------------|--|------------|
| Power | Lumen | Power Factor | Voltage | Frequency | Energy Efficiency | Size | Beam Angle |
| 13 Watt | 800Lm | 0.54 | 220-240v | 50/60 Hz | A+ | Width :210 mm Length :35 mm Height :210 mm | 135° |



OUTDOOR LIGHTING



**WALL
LIGHTING**

OUTDOOR LAMP PILLAR







OUTDOOR LAMP PILLAR

Landscape, Garden, Walk light, Tree, Courtyard, Malls, Hotels, Resorts.

SPECIFICATIONS

| CONSTRUCTION | | | | | | IDENTITY | |
|--------------|---------------|-----------|-------------------|---------------------------|---------------------|------------------|-------|
| Body | Diffuser | Reflector | LED Type & Origin | Driver, Brand, Power, Amp | Surface or Recessed | Code | Color |
| Aluminum | Polycarbonate | Aluminum | Led E27 | - | Surface | 2091/120/m/l/300 | ● |

| ELECTRICAL DATA | | | | | | FIXTURE PARAMETERS | |
|--|-------|--------------|--|--|---|--|------------|
| Power | Lumen | Power Factor | Voltage | Frequency | Energy Efficiency | Size | Beam Angle |
|  E27 - 40w max | - | - |  DC100-265v |  50/60 Hz |  A | 220 x 220xH27mm/300 x 300xH330mm | - |



40.000 Hrs



-20°C to +50°C



UP & DOWN SQUARE / ROUND








UP&DOWN SQUARE / ROUND


Landscape, Garden, Walk light, Tree, Courtyard, Malls, Hotels, Resorts.

SPECIFICATIONS

| CONSTRUCTION | | | | | | IDENTITY | |
|--------------|----------|-----------|-------------------|---------------------------|---------------------|----------------------|-------|
| Body | Diffuser | Reflector | LED Type & Origin | Driver, Brand, Power, Amp | Surface or Recessed | Code | Color |
| Aluminum | Glass | Aluminum | Led E27 | - | Surface | Up&down Square/Round | ● ○ ● |

| ELECTRICAL DATA | | | | | | FIXTURE PARAMETERS | |
|--|-------|--------------|--|--|---|--------------------|---|
| Power | Lumen | Power Factor | Voltage | Frequency | Energy Efficiency | Size | Beam Angle |
|  E27 - 40w max | - | - |  DC100-265v |  50/60 Hz |  A | 155 x90x90mm |  45° |



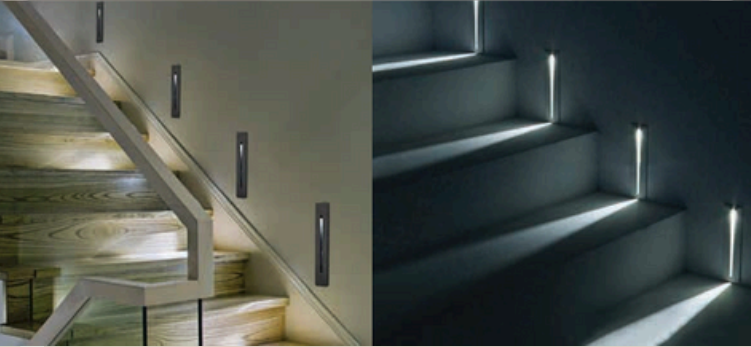

OUTDOOR STEP STAIR



OUTDOOR STEP STAIR

1. Hotel, Entertainment place, Household.
2. Exhibition, Fashionable dress act.
3. Saloon, coffee, house, Photography area.
4. High-class stores, Bathroom.
5. Restaurant, Shopping Mall.

SPECIFICATIONS

| CONSTRUCTION | | | | | | IDENTITY | |
|----------------------|----------|-----------|-------------------|---------------------------|---------------------|----------------|-------|
| Body | Diffuser | Reflector | LED Type & Origin | Driver, Brand, Power, Amp | Surface or Recessed | Code | Color |
| Die-casting Aluminum | PC | Aluminum | CREE (Origin USA) | DONE (Korean) | Recessed | LT-SP-S100/200 | ● |

| ELECTRICAL DATA | | | | | | FIXTURE PARAMETERS | |
|-----------------|---------------|--------------|---------------|--------------|-------------------|--|------------|
| Power | Lumen | Power Factor | Voltage | Frequency | Energy Efficiency | Size | Beam Angle |
| 3w/6w | 225/450Lm | 0.6 | AC85-265v | 50/60 Hz | A+ | Size L103 x W60mm Cut L95 x W50mm/Size L210 x W60mm Cut L200 x W55mm | 11° |



DU-LT-XQD5055-18/24










DU-LT-XQD5055-18/24

Landscape, Garden, Walk light, Tree, Courtyard, Malls, Hotels, Resorts.



SPECIFICATIONS

| CONSTRUCTION | | | | | | IDENTITY | |
|---|----------|-----------|-------------------|---------------------------|---------------------|---------------------|-------|
| Body | Diffuser | Reflector | LED Type & Origin | Driver, Brand, Power, Amp | Surface or Recessed | Code | Color |
| Aluminum Gasket O-ring PMQ silicon seal | Glass | Aluminum | Epistar (Taiwan) | Done (Korean) | Recessed | DU-LT-XQD5055-18/24 | ● |

| ELECTRICAL DATA | | | | | | FIXTURE PARAMETERS | |
|---|--|---|--|--|---|----------------------------------|---|
| Power | Lumen | Power Factor | Voltage | Frequency | Energy Efficiency | Size | Beam Angle |
|  18/24w |  1440/1920lm |  0.6 |  DC100-265v |  50/60 Hz |  A+ | L995xW50xH60mm L495xW50xH60mm |  45° |



OUTDOOR LIGHTING

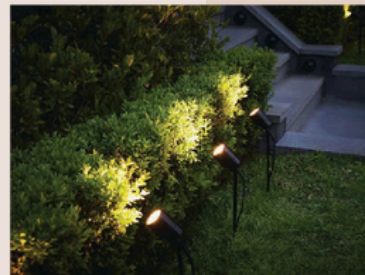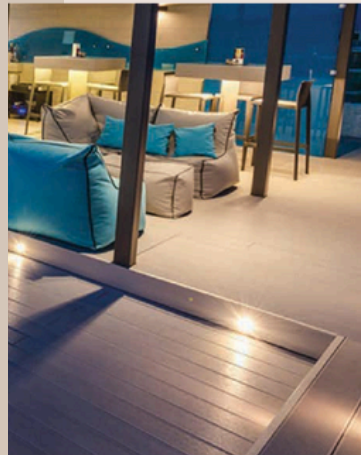

LANDSCAPE LIGHTING

OUTDOOR UPLIGHTER



OUTDOOR UPLIGHTER

Landscape, Garden, Walk light, Tree, Courtyard, Malls, Hotels, Resorts.

SPECIFICATIONS

| CONSTRUCTION | | | | | | IDENTITY | |
|--------------|----------|-----------|-------------------|---------------------------|---------------------|-------------|-------|
| Body | Diffuser | Reflector | LED Type & Origin | Driver, Brand, Power, Amp | Surface or Recessed | Code | Color |
| Aluminum | GLASS | Aluminum | Epistar (Taiwan) | DONE (Korean) | Recessed | DL-MDD-C100 | ● |

| ELECTRICAL DATA | | | | | | FIXTURE PARAMETERS | |
|-----------------|----------|--------------|--------------|------------|-------------------|-------------------------|------------|
| Power | Lumen | Power Factor | Voltage | Frequency | Energy Efficiency | Size | Beam Angle |
| 🔌 5W | 💡 450 lm | ⚡ 0.6 | ⚡ DC100-265v | 📡 50/60 Hz | 💡 A+ | 55x55xH80mm Cut 45mm | ↗ 45° |



—



OUTDOOR UPLIGHTER



OUTDOOR UPLIGHTER

Landscape, Garden, Walk light, Tree, Courtyard, Malls, Hotels, Resorts.

SPECIFICATIONS


| CONSTRUCTION | | | | | | IDENTITY | |
|--------------------------|----------|-----------|-------------------|---------------------------|---------------------|-------------------------|-------|
| Body | Diffuser | Reflector | LED Type & Origin | Driver, Brand, Power, Amp | Surface or Recessed | Code | Color |
| Passivated 6063 aluminum | PMMA | PMQ | Epistar (Taiwan) | Done (Korean) | Recessed Inground | DU-LT-MDD-A-7/12/18/24W | ● |

Front cover
Stainless steel 316L

Glass Step
type, tempered glass, T=8mm

Gasket O-ring
PMQ silicon seal

| ELECTRICAL DATA | | | | | | FIXTURE PARAMETERS | |
|-----------------|------------------------|--------------|-----------|-----------|-------------------|---|------------|
| Power | Lumen | Power Factor | Voltage | Frequency | Energy Efficiency | Size | Beam Angle |
| 7/12/18/24W | 560/960/1440 1920lm | 0.6 | AC85-265v | 50/60 Hz | A+ | Dia150x H90mm/ Dia163x H90mm/ Dia203x H95mm/ Dia220x H90mm | 45° |



50,000 Hrs



-20°C to +50°C



OUTDOOR WALK LIGHT









OUTDOOR WALK LIGHT

Applications : square, plaza, garden, lawn, playground, tennis stadium, basketball stadium, golf course, bus station, airport, sculpture, architecture, arts work, street, show room exhibition, etc.

SPECIFICATIONS

| CONSTRUCTION | | | | | | IDENTITY | |
|----------------------|----------|-----------|-------------------|---------------------------|---------------------|-----------|-------|
| Body | Diffuser | Reflector | LED Type & Origin | Driver, Brand, Power, Amp | Surface or Recessed | Code | Color |
| Die-casting Aluminum | PMMA | Aluminum | Epistar (Taiwan) | DONE (Korean) | Surface | DU-LT-TGM | ● |

| ELECTRICAL DATA | | | | | | FIXTURE PARAMETERS | |
|---|---|---|---|--|--|--|---|
| Power | Lumen | Power Factor | Voltage | Frequency | Energy Efficiency | Size | Beam Angle |
|  2w/3w/4w |  150/225 300lm |  0.9 |  AC85-265v |  50/60 Hz |  A+ | Dia150x H45mm Dia120x H40mm Dia100x H35mm Operating |  45° |



OUTDOOR SPIKE










OUTDOOR SPIKE

Application : Use for Wall, Garden, Wall Park, surrounding, the courtyard, villa, compounds, Stair, landscape, outdoor indoor.

SPECIFICATIONS

| CONSTRUCTION | | | | | | IDENTITY | |
|----------------------|----------|-----------|-------------------|---------------------------|------------------------|----------------------|-------|
| Body | Diffuser | Reflector | LED Type & Origin | Driver, Brand, Power, Amp | Surface or Recessed | Code | Color |
| Die-casting Aluminum | PMMA | PMQ | Epistar (Taiwan) | Done (Korean) | Garden Landscape, Tree | DL-TGD-P-7/12/18/24W | ● ○ ● |

| ELECTRICAL DATA | | | | | | FIXTURE PARAMETERS | |
|--|---|---|---|--|--|---|---|
| Power | Lumen | Power Factor | Voltage | Frequency | Energy Efficiency | Size | Beam Angle |
|  7/12/18/24W |  540/925/1325 1850lm |  0.6 |  AC85-265v |  50/60 Hz |  A+ | Dia125x H150mm/ Dia155x H190mm/ Dia185x H230mm/ Dia205x H245mm |  45° |



OUTDOOR BOLLARD



OUTDOOR BOLLARD

Landscape, Garden, Walk light, Tree, Courtyard, Malls, Hotels, Resorts.

SPECIFICATIONS

| CONSTRUCTION | | | | | | IDENTITY | |
|--------------|----------|-----------|-------------------|---------------------------|---------------------|----------|-------|
| Body | Diffuser | Reflector | LED Type & Origin | Driver, Brand, Power, Amp | Surface or Recessed | Code | Color |
| Aluminum | Glass | Aluminum | Epistar (Taiwan) | Done (Korean) | Landscape | 888-600 | ● |

| ELECTRICAL DATA | | | | | | FIXTURE PARAMETERS | |
|-----------------|---------|--------------|--------------|------------|-------------------|--------------------|------------|
| Power | Lumen | Power Factor | Voltage | Frequency | Energy Efficiency | Size | Beam Angle |
| 🔌 10W | 💡 900lm | ⚡ 0.6 | ⚡ DC100-265v | 📡 50/60 Hz | 💡 A+ | 150*600mm | 📐 45° |



OUTDOOR BOLLARD



OUTDOOR BOLLARD

Landscape, Garden, Walk light, Tree, Courtyard, Malls, Hotels, Resorts.

SPECIFICATIONS

| CONSTRUCTION | | | | | | IDENTITY | |
|--------------|---------------|-----------|-------------------|---------------------------|---------------------|-----------|-------|
| Body | Diffuser | Reflector | LED Type & Origin | Driver, Brand, Power, Amp | Surface or Recessed | Code | Color |
| Aluminum | Polycarbonate | Aluminum | Epistar (Taiwan) | Done (Korean) | Landscape | F881-F800 | ● |

| ELECTRICAL DATA | | | | | | FIXTURE PARAMETERS | |
|-----------------|--------|--------------|------------|-----------|-------------------|--------------------|------------|
| Power | Lumen | Power Factor | Voltage | Frequency | Energy Efficiency | Size | Beam Angle |
| 15W | 1350lm | 0.6 | DC100-265v | 50/60 Hz | A+ | 150*800mm | 120° |



50,000 Hrs



-20°C to +50°C




MODERN LIGHTING



**RECESSED
DOWN LIGHT**



RECESSED DOWNLIGHT

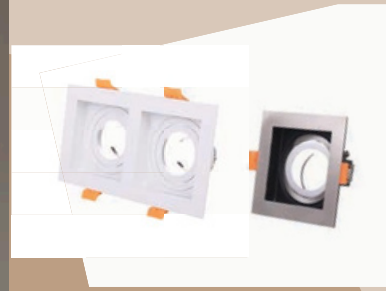






RECESSED DOWNLIGHT

1. Hotel, Entertainment place, Household.
2. Exhibition, Fashionable dress act.
3. Saloon, coffee, house, Photography area.
4. High-class stores, shopping malls.
5. Restaurant, Bathroom.


SPECIFICATIONS

| CONSTRUCTION | | | | | | IDENTITY | |
|-------------------|----------|-----------|-------------------|---------------------------|---------------------|-------------|-------|
| Body | Diffuser | Reflector | LED Type & Origin | Driver, Brand, Power, Amp | Surface or Recessed | Code | Color |
| Die-Cast Aluminum | - | Aluminum | Mr16 / Gu10 | - | Recessed Mounted | DU110/1/2/3 | ● ○ ● |

| ELECTRICAL DATA | | | | | | FIXTURE PARAMETERS | |
|--|-------|--------------|---|--|---|--|---|
| Power | Lumen | Power Factor | Voltage | Frequency | Energy Efficiency | Size | Beam Angle |
|  40w max | - | - |  AC85-265v |  50/60 Hz |  A | Size L100 W100 H40mm Cut 85mm /Size L185 W100 H40mm Cut L165 W90mm/Size L270 W100 H40mm Cut L250 W90mm |  45° |



RECESSED DOWNLIGHT

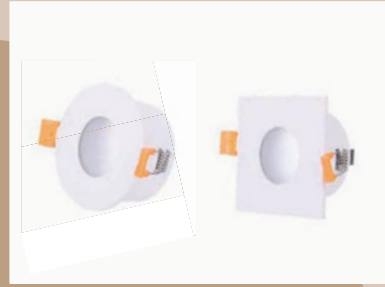

RECESSED DOWNLIGHT

1. Hotel, Entertainment place, Household.
2. Exhibition, Fashionable dress act.
3. Saloon, coffee, house, Photography area.
4. High-class stores, shopping malls.
5. Restaurant, Bathroom.

SPECIFICATIONS

| CONSTRUCTION | | | | | | IDENTITY | |
|-------------------|----------|-----------|-------------------|---------------------------|---------------------|----------|-------|
| Body | Diffuser | Reflector | LED Type & Origin | Driver, Brand, Power, Amp | Surface or Recessed | Code | Color |
| Die-Cast Aluminum | - | Aluminum | Mr16 / Gu10 | - | Recessed Mounted | DU268 | ● ○ ● |

| ELECTRICAL DATA | | | | | | FIXTURE PARAMETERS | |
|-----------------|-------|--------------|-------------|------------|-------------------|--------------------|------------|
| Power | Lumen | Power Factor | Voltage | Frequency | Energy Efficiency | Size | Beam Angle |
| ⏻ 40w max | - | - | ⚡ AC85-265v | ⚡ 50/60 Hz | 💡 A+ | W90xL90xH40mm | ↙ 45° |





RECESSED DOWNLIGHT




RECESSED DOWNLIGHT

AR111 LED Philips lamp is an energy efficient alternative to halogen AR111 lamps. The lamp lasts longer than halogen lamps and reduces energy consumption tremendously. These lamps suit a variety of applications such as track lighting, recessed ceiling lights, pendant fixtures and retail display Lighting. The lamp shape matches the standard halogen AR111 lamp shape. Recommended for use in open, vented applications.

SPECIFICATIONS

| CONSTRUCTION | | | | | | IDENTITY | |
|--|----------------------|-----------|-------------------|---------------------------|---------------------|-----------|-------|
| Body | Diffuser | Reflector | LED Type & Origin | Driver, Brand, Power, Amp | Surface or Recessed | Code | Color |
| Aluminum Electrostatic Powder Coating Body | PMMA + PC Anti Glare | Aluminum | Philips | Philips 9290014142 | Both | DU3727-30 | ● ○ ● |

| ELECTRICAL DATA | | | | | | FIXTURE PARAMETERS | |
|-----------------|-----------|--------------|-------------|------------|-------------------|--------------------|------------|
| Power | Lumen | Power Factor | Voltage | Frequency | Energy Efficiency | Size | Beam Angle |
| ⏻ 30W | 💡 3750 lm | ⚡ 0.9 | ⚡ AC85-265v | ⚡ 50/60 Hz | 💡 A+ | Dia111 x H60mm | 📐 24° |



50.000 Hrs



-20°C to +50°C



RECESSED DOWNLIGHT




RECESSED DOWNLIGHT

1. Hotel, Entertainment place, Household.
2. Exhibition, Fashionable dress act.
3. Saloon, coffee, house, Photography area.
4. High-class stores, shopping malls.
5. Restaurant, Bathroom.

SPECIFICATIONS

| CONSTRUCTION | | | | | | IDENTITY | |
|--------------|----------|-----------|-------------------|---------------------------|---------------------|-----------|-------|
| Body | Diffuser | Reflector | LED Type & Origin | Driver, Brand, Power, Amp | Surface or Recessed | Code | Color |
| Aluminum | GLASS | Aluminum | Philips | Philips | Recessed | DU6273-42 | ○ |

| ELECTRICAL DATA | | | | | | FIXTURE PARAMETERS | |
|-----------------|-----------|--------------|--------------|------------|-------------------|------------------------|------------|
| Power | Lumen | Power Factor | Voltage | Frequency | Energy Efficiency | Size | Beam Angle |
| ⏻ 42W | 💡 5250 lm | ⚡ 0.9 | ⚡ AC100-265v | ⚡ 50/60 Hz | 💡 A+ | 217*120mm cut 200mm | ↘ 45° |



RECESSED DOWNLIGHT



RECESSED DOWNLIGHT

1. Hotel, Entertainment place, Household.
2. Exhibition, Fashionable dress act.
3. Saloon, coffee, house, Photography area.
4. High-class stores.
5. Restaurant, Shopping Mall.

SPECIFICATIONS

| CONSTRUCTION | | | | | | IDENTITY | |
|----------------------|----------|-----------|-------------------|---------------------------|---------------------|------------|-------|
| Body | Diffuser | Reflector | LED Type & Origin | Driver, Brand, Power, Amp | Surface or Recessed | Code | Color |
| Die-casting Aluminum | PC | Aluminum | Philips | Philips | Recessed Mounted | DU6304-30W | ● ○ |

| ELECTRICAL DATA | | | | | | FIXTURE PARAMETERS | |
|-----------------|--------|--------------|-----------|-----------|-------------------|----------------------------|------------|
| Power | Lumen | Power Factor | Voltage | Frequency | Energy Efficiency | Size | Beam Angle |
| 30W | 3900lm | 0.9 | AC85-265v | 50/60 Hz | A+ | Dia160xH145mm Cut 135mm | 24° |





RECESSED DOWNLIGHT










RECESSED DOWNLIGHT

1. Hotel, Entertainment place, Household.
2. Exhibition, Fashionable dress act.
3. Saloon, coffee, house, Photography area.
4. High-class stores.
5. Restaurant, Shopping Mall.

SPECIFICATIONS

| CONSTRUCTION | | | | | | IDENTITY | |
|--------------|-------------|-----------|---------------------|---------------------------|---------------------|-------------|---|
| Body | Diffuser | Reflector | LED Type & Origin | Driver, Brand, Power, Amp | Surface or Recessed | Code | Color |
| Aluminum | PC + Mirror | Aluminum | Bridgelux / Philips | Eaglecrise / Philips | Recessed | BR6453A-12W |   |

| ELECTRICAL DATA | | | | | | FIXTURE PARAMETERS | |
|--|--|---|--|--|--|---------------------------|---|
| Power | Lumen | Power Factor | Voltage | Frequency | Energy Efficiency | Size | Beam Angle |
|  12W |  1200lm |  0.6 |  AC220-240v |  50/60 Hz |  A+ | Dia85 x H95mm Cut 75mm |  15° 24° 38° |



RECESSED DOWNLIGHT



RECESSED DOWNLIGHT

1. Hotel, Entertainment place, Household.
2. Exhibition, Fashionable dress act.
3. Saloon, coffee, house, Photography area.
4. High-class stores.
5. Restaurant, Shopping Mall.

SPECIFICATIONS

| CONSTRUCTION | | | | | | IDENTITY | |
|------------------------------|------------------|-----------|---------------------|---------------------------|-----------------------------|------------|-------|
| Body | Diffuser | Reflector | LED Type & Origin | Driver, Brand, Power, Amp | Surface or Recessed | Code | Color |
| Die-casting Aluminum + Glass | Anti-glare Glass | Aluminum | Bridgelux COB (USA) | Eaglerise | Recessed Mounted Waterproof | BR6447-10W | ○ |

| ELECTRICAL DATA | | | | | | FIXTURE PARAMETERS | |
|-----------------|-------------|--------------|------------|-----------|-------------------|-------------------------|------------|
| Power | Lumen | Power Factor | Voltage | Frequency | Energy Efficiency | Size | Beam Angle |
| 10W | 1000-2000lm | 0.9 | AC220-240v | 50/60 Hz | A+ | W95 x H60mm Cut 70mm | 24° |



RECESSED DOWNLIGHT



RECESSED DOWNLIGHT

The Pendant Down light series is best Suited for residential and commercial applications. Designed for new construction and retrofit, this Linear Led Down light generates neutral light high CRI (>80) in a new way that enables an Unprecedented combination of light output, high Efficacy, beautiful color, and affordability. High Lumen Output makes it suitable for working area and Showrooms.

SPECIFICATIONS

| CONSTRUCTION | | | | | | IDENTITY | |
|--|----------|-----------|-----------------------|---------------------------|---------------------|----------------|-------|
| Body | Diffuser | Reflector | LED Type & Origin | Driver, Brand, Power, Amp | Surface or Recessed | Code | Color |
| Pure Aluminum Alloy and Electrostatic Bowdre Coating | CMMB | Aluminum | 2835 Epistar (Taiwan) | DONE (Korean) | Suspendent | JYX60-S6060-48 | ● ○ ● |

| ELECTRICAL DATA | | | | | | FIXTURE PARAMETERS | |
|-----------------|----------|--------------|-------------|------------|-------------------|--------------------------------------|------------|
| Power | Lumen | Power Factor | Voltage | Frequency | Energy Efficiency | Size | Beam Angle |
| ⏻ 30-215w | 💡 2940lm | ⚡ ≥0,9 | ⚡ AC85-265v | ⚡ 50/60 Hz | 💡 A+ | (L30 up to L6000mm) * W50 * H70mm | ↗ 150° |





RECESSED DOWNLIGHT










RECESSED DOWNLIGHT

1. Hotel, Entertainment place, Household.
2. Exhibition, Fashionable dress act.
3. Saloon, coffee, house, Photography area.
4. High-class stores.
5. Restaurant, Shopping Mall.

SPECIFICATIONS

| CONSTRUCTION | | | | | | IDENTITY | |
|--------------|----------|-----------|-------------------|---------------------------|---------------------|----------|-------|
| Body | Diffuser | Reflector | LED Type & Origin | Driver, Brand, Power, Amp | Surface or Recessed | Code | Color |
| Aluminum | PC | Aluminum | Bridgelux (USA) | Eaglecrise | Recessed Mounted | BR6709R | ● ● |

| ELECTRICAL DATA | | | | | | FIXTURE PARAMETERS | |
|--|---|---|---|---|--|--|--|
| Power | Lumen | Power Factor | Voltage | Frequency | Energy Efficiency | Size | Beam Angle |
|  5/10/15/20w |  550/1100/1650 /2200lm |  0.95 |  AC220-240v |  50/60 Hz |  A+ | 70x70xH50mm Cut Ø60x60mm 120x70xH50mm Cut Ø110x60mm 162x70xH50mm Cut Ø150x60mm 256x70xH50mm Cut Ø245x60mm |  30° |



MODERN LIGHTING



**SURFACE
DOWN LIGHT**



SURFACE DOWNLIGHT










■ SURFACE DOWNLIGHT

1. Hotel, Entertainment place, Household.
2. Exhibition, Fashionable dress act.
3. Saloon, coffee, house, Photography area.
4. High-class stores.
5. Restaurant, Shopping Mall.

■ SPECIFICATIONS

| CONSTRUCTION | | | | | | IDENTITY | |
|----------------------|----------|-----------|-------------------|---------------------------|---------------------|-----------|---|
| Body | Diffuser | Reflector | LED Type & Origin | Driver, Brand, Power, Amp | Surface or Recessed | Code | Color |
| Die-casting Aluminum | Glass | Mirror | Epistar (Taiwan) | DONE (Korean) | Surface mounted | 2105-2106 |   |

| ELECTRICAL DATA | | | | | | FIXTURE PARAMETERS | |
|--|--|---|---|--|--|-----------------------------|---|
| Power | Lumen | Power Factor | Voltage | Frequency | Energy Efficiency | Size | Beam Angle |
|  7-15W |  700-1500 lm |  0.9 |  AC85-265v |  50/60 Hz |  A+ | Dia90xH115mm D108xH155mm |  45° |



SURFACE DOWNLIGHT



RECESSED DOWNLIGHT

1. Hotel, Entertainment place, Household.
2. Exhibition, Fashionable dress act.
3. Saloon, coffee, house, Photography area.
4. High-class stores.
5. Restaurant, Shopping Mall.

SPECIFICATIONS

| CONSTRUCTION | | | | | | IDENTITY | |
|----------------------|----------|-----------|-------------------|-----------------------------------|---------------------|------------------|-------|
| Body | Diffuser | Reflector | LED Type & Origin | Driver, Brand, Power, Amp | Surface or Recessed | Code | Color |
| Die-casting Aluminum | Glass | Aluminum | Bridgelux (USA) | DONE (Korean) Driver 4w-20w 300mA | Surface mounted | DU2241-3/5/7/15W | ○ ● |

| ELECTRICAL DATA | | | | | | FIXTURE PARAMETERS | |
|-----------------|-------------------------|--------------|---------------|--------------|-------------------|-------------------------------------|------------|
| Power | Lumen | Power Factor | Voltage | Frequency | Energy Efficiency | Size | Beam Angle |
| 3-5-7-15w | 270/450/630 /1100lm | 0.5 | AC85-265v | 50/60 Hz | A+ | 55*60 - 55*75 - 60*90 - 85*115mm | 45° |



-20°C to +50°C





SURFACE DOWNLIGHT










SURFACE DOWNLIGHT

1. Hotel, Entertainment place, Household.
2. Exhibition, Fashionable dress act.
3. Saloon, coffee, house, Photography area.
4. High-class stores.
5. Restaurant, Shopping Mall.

SPECIFICATIONS

| CONSTRUCTION | | | | | | IDENTITY | |
|----------------------|----------|-----------|-------------------|---------------------------|---------------------|------------|---|
| Body | Diffuser | Reflector | LED Type & Origin | Driver, Brand, Power, Amp | Surface or Recessed | Code | Color |
| Die-casting Aluminum | PC | Aluminum | Bridgelux (USA) | DONE (Korean) | Surface mounted | DU2283-10W |   |

| ELECTRICAL DATA | | | | | | FIXTURE PARAMETERS | |
|--|---|---|---|--|---|--------------------|---|
| Power | Lumen | Power Factor | Voltage | Frequency | Energy Efficiency | Size | Beam Angle |
|  10w |  800lm |  0.8 |  AC85-265v |  50/60 Hz |  A+ | 100x 105mm |  45° |





SURFACE DOWNLIGHT








RECESSED DOWNLIGHT

1. Hotel, Entertainment place, Household.
2. Exhibition, Fashionable dress act.
3. Saloon, coffee, house, Photography area.
4. High-class stores.
Restaurant, Shopping Mall.

SPECIFICATIONS

| CONSTRUCTION | | | | | | IDENTITY | |
|----------------------|----------|-----------|-------------------|---------------------------|---------------------|-----------------------|---|
| Body | Diffuser | Reflector | LED Type & Origin | Driver, Brand, Power, Amp | Surface or Recessed | Code | Color |
| Die-casting Aluminum | - | Aluminum | Mr16 / Gu10 | 12v/220v | Surface mounted | DU3012RD/ DU3013SQ |   |

| ELECTRICAL DATA | | | | | | FIXTURE PARAMETERS | |
|--|-------|--------------|--|--|--|--------------------|---|
| Power | Lumen | Power Factor | Voltage | Frequency | Energy Efficiency | Size | Beam Angle |
|  40w max | - | - |  12v/220v |  50/60 Hz |  A+ | 95 x 125mm |  45° |



SURFACE DOWNLIGHT



■ SURFACE DOWNLIGHT

1. Office building, Entries,lobbies,corridors and hall ways
2. Lobbies,food service areas, aisleways, restrooms hotels
3. Reception areas, bar and dinner areas
4. Hospital and health Care Facilities

■ SPECIFICATIONS

| CONSTRUCTION | | | | | | IDENTITY | |
|----------------------|----------|-----------|-------------------|---------------------------|---------------------|----------|-------|
| Body | Diffuser | Reflector | LED Type & Origin | Driver, Brand, Power, Amp | Surface or Recessed | Code | Color |
| Die-casting Aluminum | PMMA | - | Bridgelux (USA) | Eaglerise - 300 mA | Surface | BR 6454 | ○ ● |

| ELECTRICAL DATA | | | | | | FIXTURE PARAMETERS | |
|-----------------|----------|--------------|-------------|------------|-------------------|--------------------|------------|
| Power | Lumen | Power Factor | Voltage | Frequency | Energy Efficiency | Size | Beam Angle |
| 🔌 12w | 💡 1080lm | ⚡ 0.7 | ⚡ AC85-265v | 📡 50/60 Hz | - | Dia 63 x H 150 | 📐 25° |





SURFACE DOWNLIGHT










SURFACE DOWNLIGHT

1. Office building, Entries,lobbies,corridors and hall ways
2. Lobbies,food service areas, aisleways, restrooms hotels
3. Reception areas, bar and dinner areas
4. Hospital and health Care Facilities

SPECIFICATIONS

| CONSTRUCTION | | | | | | IDENTITY | |
|----------------------|---------------|-----------|---------------------|---------------------------|---------------------|-----------|---|
| Body | Diffuser | Reflector | LED Type & Origin | Driver, Brand, Power, Amp | Surface or Recessed | Code | Color |
| Die-casting Aluminum | Polycarbonate | - | Bridgelux COB (USA) | Eaglerise - 300 mA | Surface / Recessed | BR 6454 R |   |

| ELECTRICAL DATA | | | | | | FIXTURE PARAMETERS | |
|--|--|---|---|--|-------------------|--------------------|---|
| Power | Lumen | Power Factor | Voltage | Frequency | Energy Efficiency | Size | Beam Angle |
|  12w |  1080lm |  0.7 |  220v/240v |  50/60 Hz | - | Dia 73 x H 123 |  24° |



25,000 Hrs



0°C to +40°C





SURFACE DOWNLIGHT


















RECESSED DOWNLIGHT


1. Office building, Entries,lobbies,corridors and hall ways
2. Lobbies,food service areas, aisleways, restrooms hotels
3. Reception areas, bar and dinner areas
4. Hospital and health Care Facilities

SPECIFICATIONS

| CONSTRUCTION | | | | | | IDENTITY | |
|----------------------|---------------|-----------|---------------------|---------------------------|---------------------|-------------------------|---|
| Body | Diffuser | Reflector | LED Type & Origin | Driver, Brand, Power, Amp | Surface or Recessed | Code | Color |
| Die-casting Aluminum | Polycarbonate | PC | Bridgelux COB (USA) | Eaglerise - 1200 mA | Surface | BR2285RD - 12 /30 / 50W |   |

| ELECTRICAL DATA | | | | | | FIXTURE PARAMETERS | |
|--|--|---|---|--|--|--|---|
| Power | Lumen | Power Factor | Voltage | Frequency | Energy Efficiency | Size | Beam Angle |
|  12/30/50w |  1020/2550 /4250lm |  0.9 |  220v/240v |  50/60 Hz |  A+ | Dia70*H70mm/ Dia150*H130mm/ Dia185*H155mm |  24° |
|  |  |  |  |  |  |  -10°C to +40°C |  |

MODERN LIGHTING

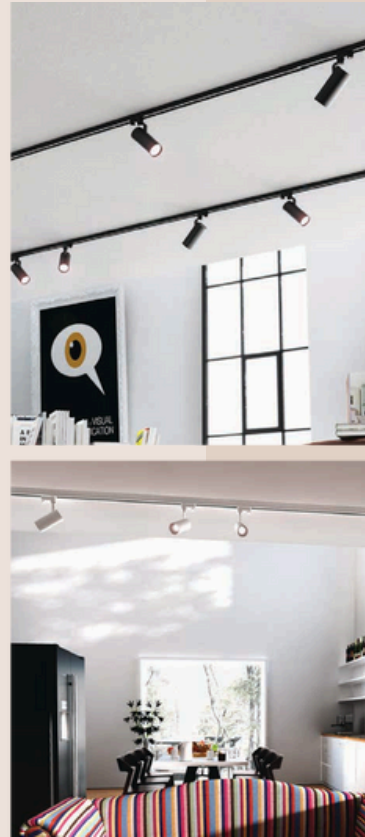

TRACKS





TRACK LIGHT










TRACK LIGHT

Tracks are especially handy when a room has an existing electrical box in the ceiling yet needs additional light directed throughout the room. For example, install a track in an older kitchen or home office when you can replace an outdated ceiling light with a track that aims light right where you need it on work surfaces and into pantries or closets.

SPECIFICATIONS

| CONSTRUCTION | | | | | | IDENTITY | |
|--------------|----------|-----------|-------------------|---------------------------|---------------------|----------|---|
| Body | Diffuser | Reflector | LED Type & Origin | Driver, Brand, Power, Amp | Surface or Recessed | Code | Color |
| Aluminum | PC | Aluminum | Philips/Bridgelux | Done / Philips | Surface | DU307 |   |

| ELECTRICAL DATA | | | | | | FIXTURE PARAMETERS | |
|--|--|---|---|--|--|--------------------|---|
| Power | Lumen | Power Factor | Voltage | Frequency | Energy Efficiency | Size | Beam Angle |
|  40w |  4000lm |  0.9 |  AC85-265v |  50/60 Hz |  A+ | Dia92xH160mm |  24° |



40,000 Hrs



-20°C to +50°C





TRACK LIGHT










TRACK LIGHT

Tracks are especially handy when a room has an existing electrical box in the ceiling yet needs additional light directed throughout the room. For example, install a track in an older kitchen or home office when you can replace an outdated ceiling light with a track that aims light right where you need it on work surfaces and into pantries or closets.

SPECIFICATIONS

| CONSTRUCTION | | | | | | IDENTITY | |
|--------------|----------|-----------|---------------------|---------------------------|---------------------|------------|---|
| Body | Diffuser | Reflector | LED Type & Origin | Driver, Brand, Power, Amp | Surface or Recessed | Code | Color |
| Aluminum | PC | Aluminum | Philips / Bridgelux | Done / Philips | Surface | VL-T00GR15 |   |

| ELECTRICAL DATA | | | | | | FIXTURE PARAMETERS | |
|--|--|---|---|--|--|--------------------|---|
| Power | Lumen | Power Factor | Voltage | Frequency | Energy Efficiency | Size | Beam Angle |
|  15w |  1350lm |  0.9 |  AC85-265v |  50/60 Hz |  A+ | 60 x 140mm |  24° |



40.000 Hrs



-20°C to +50°C





TRACK LIGHT



TRACK LIGHT

Tracks are especially handy when a room has an existing electrical box in the ceiling yet needs additional light directed throughout the room. For example, install a track in an older kitchen or home office when you can replace an outdated ceiling light with a track that aims light right where you need it on work surfaces and into pantries or closets.

SPECIFICATIONS

| CONSTRUCTION | | | | | | IDENTITY | |
|--------------|----------|-----------|-------------------|---------------------------|---------------------|------------|-------|
| Body | Diffuser | Reflector | LED Type & Origin | Driver, Brand, Power, Amp | Surface or Recessed | Code | Color |
| Aluminum | PC | Aluminum | Philips/Bridgelux | Done / Philips | Surface | VL-T00GR30 | ○ ● |

| ELECTRICAL DATA | | | | | | FIXTURE PARAMETERS | |
|-----------------|----------|--------------|------------|------------|-------------------|--------------------|------------|
| Power | Lumen | Power Factor | Voltage | Frequency | Energy Efficiency | Size | Beam Angle |
| 🔌 30w | 💡 3000lm | ⚡ 0.9 | ⚡ 185-230v | 📡 50/60 Hz | 💡 A+ | 80 x 160mm | ↗ 24° |



TRACK LIGHT HIGH-POWER



TRACK LIGHT HIGH-POWER

Tracks are especially handy when a room has an existing electrical box in the ceiling yet needs additional light directed throughout the room. For example, install a track in an older kitchen or home office when you can replace an outdated ceiling light with a track that aims light right where you need it on work surfaces and into pantries or closets.

SPECIFICATIONS

| CONSTRUCTION | | | | | | IDENTITY | |
|--------------|----------|-----------|-------------------|---------------------------|---------------------|----------|-------|
| Body | Diffuser | Reflector | LED Type & Origin | Driver, Brand, Power, Amp | Surface or Recessed | Code | Color |
| Aluminum | PC | Aluminum | OSRAM (GERMAN) | Done (Korean) | Surface | DU-MB12 | ● |

| ELECTRICAL DATA | | | | | | FIXTURE PARAMETERS | |
|-----------------|--------|--------------|-----------|-----------|-------------------|--------------------|------------|
| Power | Lumen | Power Factor | Voltage | Frequency | Energy Efficiency | Size | Beam Angle |
| 12w | 1320lm | 0.7 | AC85-265v | 50/60 Hz | A+ | 220 x 22 x 87mm | 24° |



INDOOR LIGHTING



MAGNETIC



MAGNETIC GRILLE LIGHT



MAGNETIC GRILLE LIGHT

1. Hotel, Entertainment place, Household.
2. Exhibition, Fashionable dress act.
3. Saloon, coffee, house, Photography area.
4. High-class stores.
5. Restaurant, Shopping Mall.

SPECIFICATIONS

| CONSTRUCTION | | | | | | IDENTITY | |
|--------------|----------|-----------|-------------------|---------------------------|---------------------|--------------------|-------|
| Body | Diffuser | Reflector | LED Type & Origin | Driver, Brand, Power, Amp | Surface or Recessed | Code | Color |
| Aluminum | PC | Aluminum | Osram German | Meanwell 48v Taiwan | Recessed | DX-36K-10T/20T/45T | ● |

| ELECTRICAL DATA | | | | | | FIXTURE PARAMETERS | |
|------------------|----------------------|--------------|-----------|--------------|-------------------|----------------------------|------------|
| Power | Lumen | Power Factor | Voltage | Frequency | Energy Efficiency | Size | Beam Angle |
| 10/20/45Watt | 1000/2000/4500lm | - | DC48v | 50/60 Hz | A+ | W32/H52 L270/534/1196mm | 30° |





MAGNETIC FLOOD LIGHT



FLOOD LIGHT

1. Hotel, Entertainment place, Household.
2. Exhibition, Fashionable dress act.
3. Saloon, coffee, house, Photography area.
4. High-class stores.
5. Restaurant, Shopping Mall.

SPECIFICATIONS

| CONSTRUCTION | | | | | | IDENTITY | |
|--------------|----------|-----------|-------------------|---------------------------|---------------------|--------------------|-------|
| Body | Diffuser | Reflector | LED Type & Origin | Driver, Brand, Power, Amp | Surface or Recessed | Code | Color |
| Aluminum | PC | Aluminum | Osram German | Meanwell 48v Taiwan | Recessed | DX-36K-10F/20F/45F | ● |

| ELECTRICAL DATA | | | | | | FIXTURE PARAMETERS | |
|------------------|----------------------|--------------|-----------|--------------|-------------------|----------------------------|------------|
| Power | Lumen | Power Factor | Voltage | Frequency | Energy Efficiency | Size | Beam Angle |
| 10/20/45Watt | 1000/2000/4500lm | - | DC48v | 50/60 Hz | A+ | W32/H52 L270/534/1196mm | 150° |





MAGNETIC PENDANT LIGHT



PENDANT
MAGNETIC
LAMP

MAGNETIC PENDANT LIGHT

1. Hotel, Entertainment place, Household.
2. Exhibition, Fashionable dress act.
3. Saloon, coffee, house, Photography area.
4. High-class stores.
5. Restaurant, Shopping Mall.

SPECIFICATIONS

| CONSTRUCTION | | | | | | IDENTITY | |
|--------------|----------|-----------|-------------------|---------------------------|---------------------|-----------|-------|
| Body | Diffuser | Reflector | LED Type & Origin | Driver, Brand, Power, Amp | Surface or Recessed | Code | Color |
| Aluminum | PC | Aluminum | Cree USA | Meanwell 48v Taiwan | Recessed | DX-SF-60T | ● |

| ELECTRICAL DATA | | | | | | FIXTURE PARAMETERS | |
|-----------------|----------|--------------|---------|------------|-------------------|--------------------|------------|
| Power | Lumen | Power Factor | Voltage | Frequency | Energy Efficiency | Size | Beam Angle |
| 🔌 10W | 💡 1000lm | - | ⚡ DC48v | 📡 50/60 Hz | 💡 A+ | φ60*H400mm | 📐 24° |



50,000
Hrs



-20°C to
+50°C



RoHS



MAGNETIC TRACK



MAGNETIC TRACK

1. Hotel, Entertainment place, Household.
2. Exhibition, Fashionable dress act.
3. Saloon, coffee, house, Photography area.
High-class stores.
Restaurant, Shopping Mall.

SPECIFICATIONS

| CONSTRUCTION | | | | | | IDENTITY | |
|--------------|----------|-----------|-------------------|---------------------------|---------------------|----------------|-------|
| Body | Diffuser | Reflector | LED Type & Origin | Driver, Brand, Power, Amp | Surface or Recessed | Code | Color |
| Aluminum | PC | Aluminum | Osram German | LRS - Meanwell 48v Taiwan | Recessed | DX-CX03-5T/10T | ● |

| ELECTRICAL DATA | | | | | | FIXTURE PARAMETERS | |
|-----------------|-------------|--------------|---------|-----------|-------------------|-------------------------|------------|
| Power | Lumen | Power Factor | Voltage | Frequency | Energy Efficiency | Size | Beam Angle |
| 12/24Watt | 1200/2400lm | - | DC48v | 50/60 Hz | A+ | L135/L270mm W35 H150 | 30° |



50,000 Hrs



-20°C to +50°C



RoHS



MAGNETIC TRACK



MAGNETIC TRACK

1. Hotel, Entertainment place, Household.
2. Exhibition, Fashionable dress act.
3. Saloon, coffee, house, Photography area.
4. High-class stores.
5. Restaurant, Shopping Mall.

SPECIFICATIONS

| CONSTRUCTION | | | | | | IDENTITY | |
|--------------|----------|-----------|-------------------|---------------------------|---------------------|---------------|-------|
| Body | Diffuser | Reflector | LED Type & Origin | Driver, Brand, Power, Amp | Surface or Recessed | Code | Color |
| Aluminum | PC | Aluminum | Cree USA | MeanWell 48v | Recessed | DX-CX-60T/70T | ● |

| ELECTRICAL DATA | | | | | | FIXTURE PARAMETERS | |
|-----------------|-------------|--------------|---------|-----------|-------------------|-----------------------|------------|
| Power | Lumen | Power Factor | Voltage | Frequency | Energy Efficiency | Size | Beam Angle |
| 12/24Watt | 1200/2400lm | - | DC48v | 50/60 Hz | A+ | L130*60mm/ L160*70 | 24° |





MAGNETIC TRACK



MAGNETIC TRACK

1. Hotel, Entertainment place, Household.
2. Exhibition, Fashionable dress act.
3. Saloon, coffee, house, Photography area.
High-class stores.
Restaurant, Shopping Mall.

SPECIFICATIONS

| CONSTRUCTION | | | | | | IDENTITY | |
|--------------|----------|-----------|-------------------|---------------------------|---------------------|--------------|-------|
| Body | Diffuser | Reflector | LED Type & Origin | Driver, Brand, Power, Amp | Surface or Recessed | Code | Color |
| Aluminum | - | Aluminum | - | 48v | Recessed | DC48V DX-36B | ● |

| ELECTRICAL DATA | | | | | | FIXTURE PARAMETERS | |
|-----------------|-------|--------------|---------|------------|-------------------|-----------------------|------------|
| Power | Lumen | Power Factor | Voltage | Frequency | Energy Efficiency | Size | Beam Angle |
| - | - | - | ⚡ 48v | ⚡ 50/60 Hz | 💡 A+ | W36 * H70 * L200mm | - |





MAGNETIC TRACK



MAGNETIC TRACK

1. Hotel, Entertainment place, Household.
2. Exhibition, Fashionable dress act.
3. Saloon, coffee, house, Photography area.
4. High-class stores.
5. Restaurant, Shopping Mall.

SPECIFICATIONS

| CONSTRUCTION | | | | | | IDENTITY | |
|--------------|----------|-----------|-------------------|---------------------------|---------------------|--------------|-------|
| Body | Diffuser | Reflector | LED Type & Origin | Driver, Brand, Power, Amp | Surface or Recessed | Code | Color |
| Aluminum | - | Aluminum | - | 48v | surface | DC48V DX-36A | |

| ELECTRICAL DATA | | | | | | FIXTURE PARAMETERS | |
|-----------------|-------|--------------|---------|-----------|-------------------|--------------------|------------|
| Power | Lumen | Power Factor | Voltage | Frequency | Energy Efficiency | Size | Beam Angle |
| - | - | - | 48v | 50/60 Hz | A+ | W36 * H70 * L200mm | - |



-20°C to +50°C

Thank You

WE ARE READY TO ASSIST YOU



El-Tahra Mall, Street 34, 1st District , Zayed



01014074000



info@rexamgroup.com